

อิทธิพลขององค์ประกอบที่มีต่อสมบัติเชิงความร้อนและโอกาสของปรากฏการณ์
การเกาะตัวกันเป็นก้อนของผลิตภัณฑ์นมผง
Compositional Effect on Thermal Properties and Opportunities of Milk Powder
Stickiness Phenomena

ณัฐธิกา ศีลาลัย^{1,*} และ อูริยา รุส²

Nattiga Silalai^{1,*} and Yrjö H. Roos²

ABSTRACT

Stickiness in the production of food powders can cause low yield, operational problems of equipment, powder-handling problems and fire hazards. It may result from the appearance of attractive forces between particles including static electricity. Stickiness in food systems often appears when the surface viscosity of amorphous particle components decreases and particles adhere. Increasing adhesion forces between particles causing stickiness and caking depends on the material properties, storage and processing conditions. Stickiness is a serious problem in spray drying of sugar-rich and fat-rich products, such as milk and juice. Solids composition affects structure formation and changes of foods during processing and storage. Powders containing high sugar contents show high adhesion of powder particles with increasing temperatures and water contents as a result of surface plasticization and the formation of liquid bridges. The stickiness of milk powders resulted from liquid flow of amorphous non-fat solids components, such as lactose and other hydrophilic components. They are plasticized by water, which is one of the dominant factors that control glass transition of amorphous solids. Glass transition is relation to stickiness and the SPT at 20 °C above the T_g . Increasing molecular mobility of molecules occurs above glass transition with concomitant appearance of viscous liquid-like characteristics,

which are relative to the development of stickiness in amorphous particles. Although several researchers have indicated the relationships of stickiness and glass transition, the relaxation times and molecular mobility still remain as challenging areas in the glass transition research. Increased molecular mobility is related to decreased relaxation times and a lower viscosity above the glass transition. Changes in solid structure around the glass transition of amorphous systems can be measured from molecular motions using various techniques, such as dielectric analysis (DEA) and dynamic-mechanical analysis (DMA). The primary α -relaxation appears in measurements of dielectric and mechanical properties since the molecules gain translational mobility and long-range molecular motions around the glass transition. However, the stickiness behavior and molecular mobility of milk solids systems with different solids compositions (carbohydrate-carbohydrate and carbohydrate-protein) has not been either well addressed. Therefore, the present review emphasized the solids compositional effect on relaxations and molecular mobility around the glass transition in relation to stickiness behavior.

Key words: glass transition, relaxation, stickiness, molecular mobility, solid composition

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

1. Stickiness and Caking of Powders

Stickiness and caking are phenomena that often occur during production and storage of dried powders. Stickiness and caking phenomena occur in amorphous foods, which are heated or exposed to high humidities. The difference between stickiness and caking is not always clearly defined, but it may be assumed that stickiness refers to the tendency of a material to adhere on a surface. Such adhesion may occur temporarily and it does not necessarily involve caking. Caking may be considered as a collapse phenomenon, which occurs when particles form permanent aggregates and harden into a mass, resulting in loss of free-flowing properties. Caking occurs over time and stickiness appears as an instantaneous process [1].

Stickiness appears as adhesion or cohesion of two similar or different surfaces.

An example is a hygroscopic material such as a sugar-rich product, which sorbs water rapidly resulting in a decrease in surface viscosity and may be called a sticky material. The mechanism of stickiness and caking of powders can be explained by surface properties [2-5]. Surface property is directly related to interfacial surface energy of contacting materials, viscosity and surface tension of components [2-3]. Surface tension is an important parameter for characterizing adhesive behavior of materials. The driving force for the flow is surface tension, and resistance to flow is measured through the viscosity [3-5]. Greater surface tension-driving force or longer contact times allow the liquid flow to build a bridge between particles, while higher viscosity decreases tendency toward sticking (Figure 1).

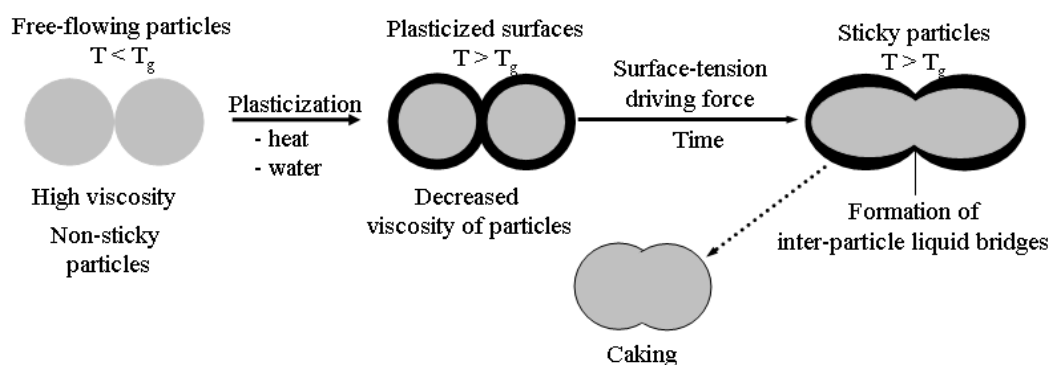


Figure 1 Schematic diagram explaining mechanism for occurrence of stickiness and caking in powders [6].

Downton et al. [3] estimated the critical viscosity was 10^6 - 10^8 Pa.s, which indicated sticky-point temperature as measured by method of Lazar et al. [7]. Roos and Karel [8] found that the critical viscosity was related to temperature 10-20°C above T_g . The viscosity of

amorphous foods is extremely high in the glassy state (10^{12} - 10^{16} Pa.s), but it decreases dramatically with increasing temperature or water content. Under the influences of water and thermal plasticization, a glassy material transforms into supercooled liquid, of which

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

surface viscosity may reduce to below the critical viscosity [3] inducing adhesion and stickiness of particles within a short time [5, 9]. Above T_g , the reduced viscosity is related to increased molecular mobility of the systems, which has been determined by several techniques such as dielectric and dynamic-mechanical analysis [10-17].

2. Powder Characterization

Free-flowing properties are crucial in powder production and handling. Stickiness properties in dairy powders have been studied extensively as they may significantly affect changes in flow characteristics during spray drying and storage of powders [18]. The changes in moduli and flow properties of synthetic polymers occurring above the glass transition have been investigated by Bengoechea et al. [14]. Glass transition reflects the molecular mobility of amorphous components, and it can be measured from changes in material characteristics [15, 19-20]. Above the T_g , the increased molecular motions result in softening of amorphous components [10, 13, 16-17, 21-23]. Thus, the techniques often used in the characterization of powder stickiness are based on the detection of their structural properties associated with glass transition.

2.1. Torque Measurement

Retarded flow at some temperature and water content indicates a 'sticky point' for the powder, which can be measured by various techniques [7, 24-25]. Sticky-point tester is one of the oldest techniques used for characterizing stickiness behaviour of powders.

It was used by Lazar et al. [7] to measure the sticky-point of tomato powders. In this technique, a test tube is packed with a powder sample of known water content and sealed using rotating mercury seal. Subsequently, the tube is immersed in a water bath. The temperature of the bath is slowly increased while the powder is stirred by the small stirrer embedded in the powder samples. A certain temperature, at which the force required to turn the stirrer increases sharply, is recorded as a function of water content of powder. The temperature at this point is referred to as the sticky-point temperature (SPT) of the powder [3, 26]. However, this technique cannot provide quantitative information about the strength of materials and they are clear to monitor the changes that occur in the powder at the early stages of stickiness. Therefore, this technique has been developed by Özkan et al. [24] determining stickiness of milk powders based on the measurement of the torque during stirring of a powder sample and it is suitable for the determination of flow properties of powders as affected by their stickiness behavior.

Many studies have been carried out to relate stickiness and glass transition [8, 16, 18, 27-29]. Flow characteristics of amorphous food solids are affected by the glass transition due to changes in molecular mobility which is coupled with dielectric and mechanical α -relaxations [10-11, 13, 15-16, 21-23, 30]. Impaired flow of amorphous solids may be observed at a specific temperature at which the surface viscosity of particles falls to below a critical value referred to as sticky-point [3, 7]

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

Roos and Karel [8] showed that sticky-point temperatures as reported by Downton et al. [3] for an amorphous sucrose/fructose (7:1) mixture followed its glass transition temperature, T_g , measured using differential scanning calorimetry (DSC). Glass transition of an amorphous solid results in increasing translational mobility of molecules with concomitant appearance of liquid-like characteristics (Figure 2), which are associated

with the development of stickiness in amorphous particles [8, 15-16, 18, 25, 27, 29]. Glass transitions are reported as results of measurements of thermodynamic changes during heating of a glassy solid to above its glass transition. A differential scanning calorimetric (DSC) measurement shows a change in heat capacity over the material specific glass transition.

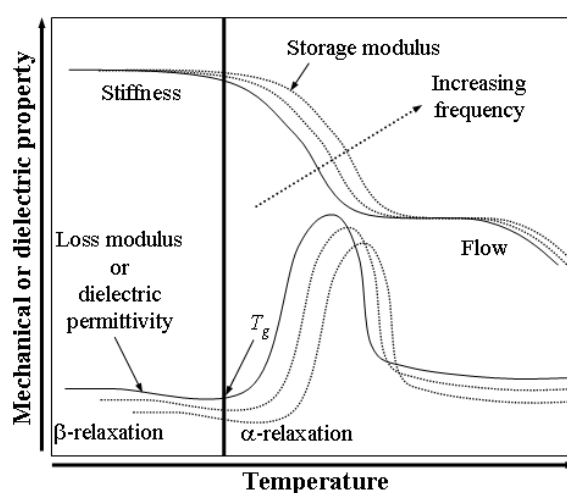


Figure 2 Changes in dielectric and mechanical properties of materials around and above glass transition. In dielectric measurements, dielectric permittivity increases rapidly and shows a dielectric peak above glass transition temperature, while mechanical properties show a drop in storage modulus and a peak of loss modulus at temperature above T_g . The α -relaxation as measured by dielectric (DEA) and dynamic-mechanical (DMA) analysis can be identified from changes in dielectric and mechanical properties around and above glass transition. Appearance of α -relaxation suggests some changes in molecular mobility in the materials [6, 52].

Above the glass transition, enhanced molecular mobility is associated with decreasing relaxation times and a lower viscosity. The α -relaxations indicating molecular mobility around the glass transition can be observed from changes in dielectric and mechanical properties as reported by several studies [10-11, 13, 16, 21-23, 30-32]. Changes in dielectric and mechanical properties above the glass transition are also

shown in Figure 2. The α -relaxations are frequency-dependent, indicating the non-equilibrium and time-dependent nature of the system.

2.2. Dielectric Analysis

Dielectric Thermal Analysis (DEA/DETA): This technique provides the various dielectric relaxations of the amorphous systems, which have been measured from changes in

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

dielectric properties including the dielectric constant or permittivity (ϵ'), dielectric loss (ϵ''), and their ratio $\tan \delta = (\epsilon''/\epsilon')$ as a function of temperature. The ϵ' describes an alignment of dipoles (permittivity) and the ϵ'' describes an energy that is required to align dipoles, i.e., dielectric loss [13, 15, 33]. The method has been used in characterization of liquid and solid systems including low molecular weight sugars and high molecular weight components, such as wheat and powder samples, over a wide temperature range [13, 22, 33-37]. Many authors used the DEA measurement to observe glass transitions in food materials such as frozen wheat dough systems [33] and amorphous polyols [13]. However, some authors attempted to correlate dielectric relaxation with the textural properties of food materials such as crispness using the dielectric spectroscopy. This technique provides the information of molecular mobility of material components due to the rotation of the dipoles expected to couple with the structural relaxation of the matrix [16, 22]. Dielectric relaxation studies on low molecular weight sugars and the mixtures [34-35, 38] showed a primary (α) relaxation associated with molecular orientation in the viscous liquid, while sub- T_g relaxations (below calorimetric T_g) such as γ - and β -relaxations is a result of the motion of pendant hydroxymethyl group.

2.3. Dynamic-Mechanical Analysis

Dynamic-Mechanical Thermal Analysis (DMA/DMTA): DMA series the molecular motions and viscoelastic behavior of a material

by applying a stress to the material and monitoring its response. The mechanical α -relaxation as measured by the DMA is analogous to the dielectric α -relaxation and it results in a decrease in storage modulus, E' , and a peak in loss modulus, E'' , and $\tan \delta$ around the glass transition [11]. Amorphous materials show various relaxations when they are exposed to an external, oscillating stress. The main relaxation associated with the glass transition is known as an α -relaxation. The α -relaxation can be observed from change in modulus at temperature above glass transition. The α -relaxation appears as storage modulus decreases dramatically and loss modulus increases with increasing temperature (Figure 2). These changes are frequency-dependent and followed the nonequilibrium, time-dependent nature of glassy and supercooled liquid forms of the amorphous materials [16, 30, 39]. T_g of carbohydrates is weakly dependent on structure but it is strongly dependent on molecular weight [8, 17, 40], while the DMA data of food and other systems have shown that this technique is more sensitive to changes in material properties around the glass transition than DSC [13, 15, 41-42]. Changes in mechanical behavior and molecular relaxations have been used to explain the textural properties of bread [16, 21-23].

3. Stickiness in Food Processing and Handling

3.1. Composition and Particle

Stickiness of milk powders is affected by solids composition and water content, which can control glass transition temperature

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

of systems [18, 27, 43-45]. Solids of dehydrated dairy products include lactose, lipids, proteins and minerals. Lactose, proteins and minerals are miscible with water or water-soluble while lipids have fairly little interactions with water [20, 43-44, 46]. The physical state of the non-fat solids (SNF) is highly dependent on water content [1, 43-44, 47-48]; thus, it is important in drying process and stability of dehydrated dairy foods [46, 49]. Lactose in liquid dairy products is dissolved in a continuous water phases, which contains dispersed fat and proteins. Milk powders containing high lactose contents exhibit high adhesive behavior of powder particles when temperature and water content is increased due to surface plasticization [15, 20]. A rapid removal of water in subsequent spray drying allows glass forming of solutes, such as lactose, because lactose is transformed directly from a viscous liquid-like material to a solid-like, amorphous, glass [50-52]. Surface plasticization results in the formation of inter-particle liquid bridges and stickiness as shown in Figure 1. However, the formation of liquid bridges may either result from partial melting of milk fat at surfaces of particles [53-56] or the liquid flow of amorphous surface components [27, 45, 53, 56]. Amorphous carbohydrates, such as lactose, and other hydrophilic compounds are plasticized (softened) by water, which controls the glass transition (transformation of amorphous solid structures to viscous liquid-like materials) of drying dairy solids and also powder stickiness [18, 20, 27, 53].

The tendency of stickiness is also relative to particle size distribution of powders resulting in adhesive and cohesive behavior of powders. Powders containing small particles have high contact area of particles for coalescence [53]. A small contact area of particles is sufficient to form strong bridges between particles, such as liquid and/or solid bridges [57]. Liquid bridges between particle surfaces represent the adhesion and stickiness in agreement with Downton et al. [3], exhibiting that stickiness occurs when sufficient liquid flow can build the inter-particle liquid bridges. Solid bridges may be formed by sintering, by chemical bonds or by crystallization [45, 57-58].

3.2. Stickiness of Powders: Problems and Opportunities

Stickiness is a major problem in various drying operations and handling of low-moisture food materials or dried powders. Dehydration of food materials is often carried out by spray drying allowing free water removal and decreasing changes in food structure. In a drying process, stickiness occurs when insufficiently-dried particles collide with other particles or drier walls due to water plasticization [2-3, 59] and the formation of liquid bridges between particles [4, 9, 53, 57]. Major problems of stickiness are associated with the presence of high concentrations of sugar in the products [1, 29]. Low molecular weight sugars have glass transition at low temperatures and sticky behavior is typical of dehydrated sugar-rich foods at low humidities [60]. Spray drying of solids with low T_g is quite

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

difficult since they cannot be dehydrated well during drying (Figure 3). Thus, the products may remain as syrup which can block and stick on the drier wall. This causes low product recovery and operating problems. The solution of these problems is often achieved by a rapid glass forming of solutes [49, 61] and the addition of high molecular weight compounds, such as maltodextrins and proteins [17, 20, 28-29, 62-65]. High molecular weight compounds, often used as drying aids, increase T_g and viscosity of solids resulting in the formation of the solid structures (Figure 3) and extension of contact times required for stickiness and adhesion [3, 5, 17, 66-68]. The amorphous structures of carbohydrates and other hydrophilic components form during rapid dehydration of food solids by spray drying [9, 28].

Various types of impacts of stickiness properties have been reported in many studies [4, 26, 58]. Most important technology for powder particles is agglomeration, which is inter-particle adhesion process to increase particle size of powders [57]. In food manufacturing and pharmaceutical industries, several agglomeration technologies have been applied in spray drying either as an integrated or external process. Agglomerated food powders have gained attention in recent years due to their convenience in applications during transportation, handling, processing and for product formulations [6]. Agglomeration is a common technique to increase the particle size of fine food powders [52]. Agglomeration of food powders is often referred to as “*instantizing*” due to the improved rewetting

characteristics of the agglomerated powders prior to drying [69]. Agglomeration uses the control of surface plasticization allowing particles to adhere to, form inter-particle liquid bridges and agglomerate [2, 58-59]. The advantage of agglomerated powders is an increasing water uptake in rehydration and formation of reconstituted liquid foods as the agglomerates have channels between adhered particles [57, 69]. However, processing conditions of agglomeration was reported to be critical because overwetting resulted in unacceptable agglomerates such as stickiness and caking of powders.

4. Stickiness of Carbohydrate-Protein Systems

4.1. Glass Formation of Milk Solids

In dairy systems, lactose is often responsible for stickiness of milk powders. Lactose vitrifies in spray drying if the water content is sufficiently decreased. Dehydration is an efficient food preservation method, which reduce water content and water activity to levels that do not allow the growth of microorganisms. Dehydration of food materials is often carried out by air drying, allowing free evaporation of water with decreasing volume and changes in food structure. A spray-drying process involves atomization of liquid and rapid dehydration of particles. This process requires solidification of particle surfaces at the initial conditions in the drying to retain free-flowing properties of particles and avoid stickiness of particles in the equipment. Dehydration of the atomized liquid particles proceeds from the particle surface to inner core. A layer of concentrated solutes is formed

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

on the particle surface. The extremely rapid water removal increases viscosity of remaining solids and the particle surface approaches the glassy state prior to colliding with other particles or drier walls [52]. A high surface viscosity of drying particle surfaces allows the formation of solids (Figure 3). In order to achieve a high viscosity, the water content must decrease since temperature increases [3]. The formation of solid structures requires a rapid increase in viscosity at the particle surfaces to extend contact time for stickiness and adhesion [3]. This can be achieved by glass-forming solutes or drying aids, such as

high-molecular-weight compounds [28, 62-65, 67].

The quality of dehydrated foods could be improved by keeping the material temperature close to or below the glass transition to avoid structural and other quality changes during dehydration and storage [5, 27]. Above T_g , powder particles are plasticized by thermal or water plasticization causing decreased viscosity (Figure 1) contributing to a liquid flow and formation of inter-particle liquid bridges and stickiness behavior [3, 5, 20, 59].

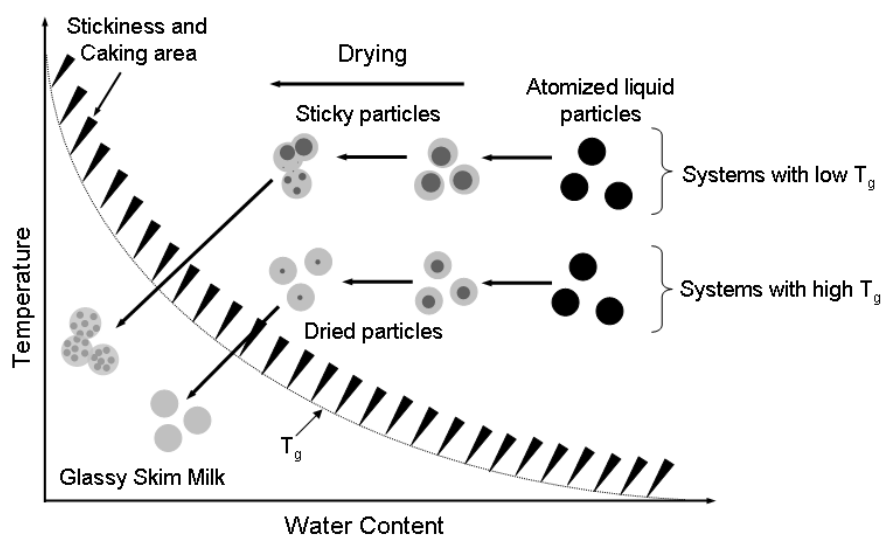


Figure 3 A schematic representation of dehydration of solid systems with low molecular weight sugars and with high molecular weight compounds during water removal in spray drying. The temperature-water content corresponding to viscous flow of plasticized solids at particle surfaces can cause stickiness, agglomeration and caking. Solid systems containing low molecular weight sugars show sticky particles due to the residual of some water contents on the particle surfaces (dark areas). Solid systems containing high molecular weight compounds give dried particles as a dried surface of particle solids is rapidly formed (grey areas) [52].

Amorphous, low molecular weight sugars, such as mono- and disaccharides, are hygroscopic and show glass transitions at low temperatures [70]. Mixing a small-molecular-weight-solvent with a glass-forming polymer

leads to depression of the glass transition temperature [71]. The evaluation of compositional effects on physical properties may often be based on the effects of food components on the T_g of their binary or

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

tertiary mixtures [72]. Maltodextrins are widely used as food components to increase T_g of food solids [17] as maltodextrins are mixtures of homologous carbohydrate polymers [73], which have high T_g values [8]. Maltodextrins are supplied with different dextrose equivalent (DE) values, which link to the number average molecular weight and their T_g [8]. Low DE maltodextrins are; therefore, often mixed with foods containing low molecular weight sugars to obtain solids with increased T_g and improved dehydration properties [17, 20, 28]. However, many studies indicated that high-molecular-weight proteins did not show a significant effect on T_g of sugar/protein mixtures due to low miscibility of proteins and carbohydrates [10], but they resulted in non-sticky particles due to formation of the solid

structures and the covering of particle surfaces with hydrophobic materials [63-65].

4.2. Miscibility of the Solid Components

Polymer interaction is quite complicated leading to the complex formation, miscibility or phase separation. The mixing of biopolymers is dominated by enthalpic effects, which may be given by the relative strength of the interactions of polymers among each other, such as hydrogen bonding or dipole-dipole interactions [74-76]. Miscibility of the systems occurs when different solid components can mix homogeneously together, while phase separation of the biopolymer system results from immiscibility of two different solid components (Figure 4).

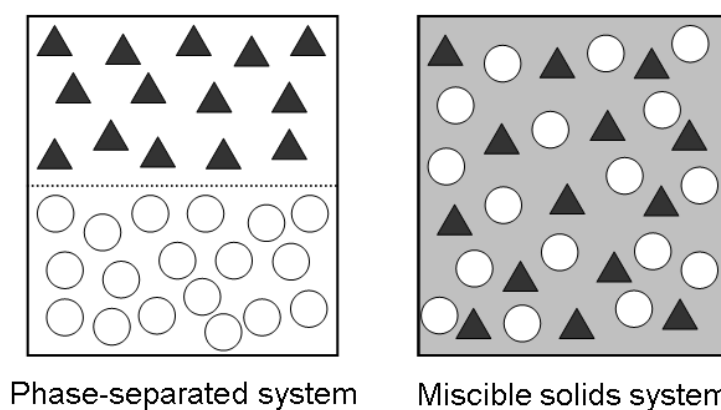


Figure 4 Schematic diagrams for the mixing behavior of two different solid components in the systems. The presence of solvent or water (grey area) can increase miscibility of mixture systems.

Phase separation and miscibility of solid components affect physicochemical properties of polymer blends; for examples, some polymers such as proteins may inhibit molecular mobility and lactose crystallization, and may act as a barrier to water diffusion due to phase separation of the system [1, 10, 47,

77]. Proteins have high hydrophobicity and they are self associated largely by hydrophobic interactions and phosphate group electrostatic interactions leading to phase separation in the mixture systems [10]. However, if self-associations are not too strong, the presence of solvent can enhance miscibility by diluting

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

unfavourable polymeric interactions [41, 74, 78] as shown in Figure 4.

There are several techniques used to determine the miscibility of blends. A common method used is a measure of the glass transition temperature, T_g . In general, miscible polymer mixtures have a single T_g between the two T_g values of the two components, and broadening of the transition is observed as the components become more immiscible [41, 74-75, 78]. These observations may be important in the control of physicochemical properties and stability of food materials.

4.3. Molecular Properties of Carbohydrates and Proteins

Various carbohydrates and proteins are widely used as food ingredients to stabilize food products, for example, beverage stabilization, baked products, cheese products, extruded products, powder products and pharmaceutical applications [45, 62]. Caseins are one of the milk proteins and consist of four components (α_{s1} -, α_{s2} -, β - and κ -casein) depending on molecular weight (19,000-23,900) determined by SDS PAGE electrophoresis [79]. Maltodextrins are hydrolysis products of starch, consisting of α -(1-4)-linked D-glucose and α -(1-6)-linked branch points, to large molecular weight distribution [73]. Information of molecular properties of solid components (molecular weight and mobility) is important to understand physicochemical properties and stability of food materials. Molecular properties of food materials are measured by mechanical and dielectric relaxations around

glass transition. The glass transition is relevant to the use of carbohydrate and protein polymers as structural materials since substantial translational motion of molecules above T_g are associated with composition of the blends [10-12, 15-17, 20, 30, 42, 77-78]. The addition of low molecular weight substances are expected to decrease T_g of miscible blends by increasing free volume available, which is relative to a considerable mobility above T_g [13, 19, 21-23, 34-35, 38, 80], whereas the presence of high molecular weight compounds in the systems shows small magnitudes of modulus changes indicating a low molecular mobility of the component molecules above glass transition [10]. Thus, high molecular weight substances are commonly used to increase viscosity and T_g of the blends [8, 20, 70] to improve powder characteristics during processing and storage [5, 28, 65, 81].

The presence of water in biopolymer-based materials is well known to have pronounced influence on their quality and stability [19-21, 51]. Amorphous solids components (carbohydrates and proteins) are plasticized or softened by water [17, 20, 43, 49, 82]. Water content has a marked effect on molecular mobility as observed changes in mechanical and dielectric properties due to water plasticization [10, 15-16, 21-23, 34-35, 38]. In fact, changes in water content of complex materials cause the strength of molecular interactions (hydrogen-bonding) between components. Increasing molecular motions of biopolymer blends in the presence of water or glycerol (plasticizers) shows

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

reduced heterogeneity or phase-separated matrix due to decreasing strength of molecular interactions or self-association within the matrix [78, 83-84].

Change in molecular chain flexibility is accompanied by important changes in the rheological behavior of materials (such as deformability, fracture mechanism or flow behavior) with increasing temperature and water content. Processes including collapse of porous matrices or stickiness are consequences of the glass transition [85]. A strong link between the glass transition, α -relaxations and flow characteristics of polymers has been shown by Bengoechea et al. [14] and Silalai and Roos [15]. Stickiness is time-dependent above the T_g and lactose as well as other sugars are the main components affecting the glass transition and stickiness in milk powders [9, 18, 20, 27]. In other amorphous carbohydrate systems, the decrease in viscosity to a relatively constant value of 10^6 to 10^8 Pa.s has been shown to correlate with stickiness of a 7:1 sucrose-fructose mixture [3]. This prediction was based on short contact times of 1 to 10 s typical of the empirical sticky point measurements using the method of Lazar et al. [7]. Such sticky points were located at temperatures of 20°C above the onset temperature of the glass transition, T_g [86]. Thus, this contact time may also be coupled with the dielectric α -relaxation time of 100 s at the calorimetric glass transition temperature, T_g [16, 87-89]. As a glass-forming liquid is supercooled, its relaxation times and viscosity increase dramatically towards the glass transition [87, 90]. Relaxation times are

extremely long in the glassy state but a dramatic decrease in relaxation times occurs above the T_g [91-94]. The temperature dependence of relaxation times below the glass transition may follow the Arrhenius relationship, but changes above the glass transition become highly temperature-dependent and deviate from Arrhenius behavior which is used to classify materials to fragile and strong glass formers [95]. A relationship of molecular mobility and viscosity may be used to show the applicability of the William-Landel-Ferry (WLF) relationship to fit viscosity data and relaxation times above the glass transition [90, 96]. The Vogel-Tammann-Fulcher (VTF) relationships can be also used to describe changes in relaxation times above glass transition [88, 97]. The composition and water content of carbohydrate glass-formers has been found to affect their sub- T_g and α -relaxations [15-16, 21-23, 30-31, 34-35, 89, 97]

Conclusions

The present study indicated that water sorption and changes in food powders, such as stickiness and crystallization were affected by solids composition and water content. Stickiness of food powders was related to plasticization of particle surfaces. Dielectric and mechanical α -relaxations were significantly related to flow characteristics and the stickiness behavior above glass transition as a result of enhanced molecular mobility of powder components, particularly mono- and disaccharides. Dielectric and mechanical α -relaxations of carbohydrate-protein solids systems could be governed by properties of

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

amorphous sugars and followed sugar mobility in a phase- or partially phase-separated protein matrix. Stickiness can be reduced by mixing high molecular weight substances such as protein and maltodextrin to food powders. Food solids with varying protein contents or low DE maltodextrin contents suggested improved dehydration characteristics as predicted from the effects on the T_g and primary relaxations. As a result, increasing high molecular weight substances content in food powders decreased changes in α -relaxations and increased relaxation times contributing to reduced level of mobility for powder stickiness. Thus, the compositional effects on the relaxation times of food powder solids were related to flow characteristics and powder stickiness around and above the glass transition. This study suggested that the α -relaxations can be used to predict flow characteristics and stickiness of food powders using temperature and water content data. This information is also useful for the control of particle flow and powder stickiness in dairy and food industries.

References:

- [1] Berlin, E., Anderson, B.A. and Pallansch, M.J. (1968). Comparison of water vapor sorption by milk powder components. *Journal of Dairy Science*. 51(12): 1912-1915.
- [2] Peleg, M. and Mannheim, C.H. (1977). The mechanism of caking of powdered onion. *Journal of Food Processing and Preservation*. 1(1): 3-11.
- [3] Downton, G.E., Flores-Luna, J.L. and King, C.J. (1982). Mechanism of stickiness in hygroscopic amorphous powders. *Industrial and Engineering Chemistry Fundamentals*. 21: 447-451.
- [4] Papadakis, S.E. and Bahu, R.E. (1992). The sticky issues of drying. *Drying Technology*. 10(4): 817-837.
- [5] Bhandari, B.R. and Howes, T. (1999). Implication of glass transition for the drying and stability of dried foods. *Journal of Food Engineering*. 40(1-2): 71-79.
- [6] Roos, Y.H. (1995). *Phase Transitions in Foods*. Academic Press: San Diego, California, USA. pp. 360.
- [7] Lazar, W.E., Brown, A.H., Smith, G.H., Wong, F.F. and Lindquist, F.E. (1956). Experimental production of tomato powder by spray drying. *Food Technology*. 10(3): 129-134.
- [8] Roos, Y.H. and Karel, M. (1991a). Phase transitions of mixtures of amorphous polysaccharides and sugars. *Biotechnology Progress*. 7: 49-53.
- [9] Bhandari, B.R. and Howes, T. (2005). Relating the stickiness property of Foods undergoing drying and dried products to their surface energetics. *Drying Technology*. 23: 781-797.
- [10] Kalichevsky, M.T., Blanshard, J.M.V. and Tokarczuk, P.F. (1993). Effect of water content and sugars on the glass transition of casein and sodium caseinate. *International Journal of Food Science and Technology*. 28: 139-151.
- [11] Moates, G.K., Noel, T.R., Parker, R. and Ring, S.G. (2001). Dynamic mechanical and dielectric characterisation of amylase-

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.

² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

- glycerol films. *Carbohydrate Polymers*. 44: 247-253.
- [12] Roudaut, G., Simatos, D., Champion, D., Contreras-Lopez, E. and Le Meste, M. (2004). Molecular mobility around the glass transition temperature. *Innovative Food Science and Emerging*. 5: 127-134.
- [13] Talja, R.A. and Roos, Y.H. (2001). Phase and state transition effects on dielectric, mechanical, and thermal properties of polyols. *Thermochimica Acta*. 380: 109-121.
- [14] Bengoechea, C., Arrachid, A., Guerrero, A., Hill, S.E. and Mitchell, J.R. (2007). Relationship between the glass transition temperature and the melt flow behavior for gluten, casein and soya. *Journal of Cereal Science*. 45: 275-284.
- [15] Silalai, N. and Roos, Y.H. (2010a). Dielectric and mechanical properties around glass transition of milk powder. *Drying Technology*. 28(9): 1044-1054.
- [16] Silalai, N. and Roos, Y.H. (2011a). Coupling of dielectric and mechanical relaxations with glass transition and stickiness of milk solids. *Journal of Food Engineering*. 104: 445-454.
- [17] Silalai, N. and Roos, Y.H. (2011b). Mechanical α -relaxations and stickiness of milk solids-maltodextrin systems around glass transition. *Journal of the Science of Food and Agriculture*. 91(14): 2529-2536.
- [18] Paterson, A.H., Brooks, G.F., Brounlund, J.E., and Foster, K.D. (2005). Development of stickiness in amorphous lactose at constant $T - T_g$ levels. *International Dairy Journal*. 15: 513-519.
- [19] Roos, Y.H., Roininen, K., Jouppila, K. and Tuorila, H. (1998). Glass transition and water plasticization effects on crispness of snack food extrudate. *International Journal of Food Properties*. 1(2): 163-180.
- [20] Silalai, N. and Roos, Y.H. (2010b). Roles of water and solids composition in the control of glass transition and stickiness of dairy powders. *Journal of Food Science and Technology*. 75(5): E285-E296.
- [21] Roudaut, G., Dacremont, C. and Le Meste, M. (1998). Influence of water on the crispness of cereal-based foods: acoustic, mechanical, and sensory studies. *Journal of Texture Studies*. 29: 199-213.
- [22] Roudaut, G., Dacremont, C. and Le Meste, M. (1999a). Molecular mobility in glassy breads: a multispectroscopy approach. *Cereal Chemistry*. 76(1) : 70-77.
- [23] Roudaut, G., Dacremont, C. and Le Meste, M. (1999b). Relaxations below glass transition temperature in bread and its components. *Cereal Chemistry*. 76(1) : 78-81.
- [24] Özkan N., Walisinghe N., and Chen X.D. (2002). Characterization of stickiness and cake formation in whole milk and skim milk powders. *Journal of Food Engineering*. 55: 293-303.
- [25] Boonyai, P., Bhandari, B. and Howes, T. (2004). Stickiness measurement techniques for food powders: a review. *Powder Technology*. 145: 34-46.
- [26] Wallack, D.A. and King, C.J. (1988). Stickiness and agglomeration of hygroscopic, amorphous carbohydrate and food powders. *Biotechnol Progress*. 4: 31-35.

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.

- [27] Chuy, L.E. and Labuza, T.P. (1994). Caking and stickiness of dairy-based food powders as related to glass transition. *Journal of Food Science*. 59: 43-46.
- [28] Bhandari, B.R., Datta, N., Crook, R., Howes, T. and Rigby, S. (1997a). A semi-empirical approach to optimize the quantity of drying aids required to spray dry sugar-rich foods. *Drying Technology*. 15(10): 2509-2525.
- [29] Bhandari, B.R., Datta, N. and Howes, T. (1997b). Problems associated with spray drying of sugar-rich foods. *Drying Technology*. 15(2): 671-684.
- [30] Champion, D., Le Meste, M. and Simotos, D. (2000). Towards and improved understanding of glass transition and relaxations in foods: molecular mobility in the glass transition range. *Trends in Food Science and Technology*. 11: 41-55.
- [31] Le Meste, M., Roudaut, G. and Davidous, S. (1996). Thermomechanical stability of glassy cereal foods. *Journal of Thermal Analysis*. 47: 1361-1376.
- [32] Royall, P.G., Huang, C., Tang, S.J., Duncan, J., Van-de-Velde, G. and Brown, M.B. (2005). The development of DMA for the detection of amorphous content in pharmaceutical powdered materials. *International Journal of Pharmaceutics*. 301: 181-191.
- [33] Laaksonen, T.J. and Roos, Y.H. (2003). Water sorption and dielectric relaxations of wheat doughs (containing sucrose, NaCl, ascorbic acid, and their mixtures). *Journal of Cereal Science*. 37: 319-326.
- [34] Noel, T.R., Parker, R. and Ring, S.G. (1996). A comparative study of the dielectric relaxation behavior of glucose, maltose, and their mixtures with water in the liquid and glassy states. *Carbohydrate Research*. 282: 193-206.
- [35] Noel, T.R., Parker, R. and Ring, S.G. (2000). Effect of molecular structure and water content on the dielectric relaxation behaviour of amorphous low molecular weight carbohydrates above and below their glass transition. *Carbohydrate Research*. 329: 839-845.
- [36] Moran, G.R., Jeffrey, K.R., Thomas, J.M. and Stevens, J.R. (2000). A dielectric analysis of liquid and glassy solid glucose/water solutions. *Carbohydrate Research*. 328: 573-584.
- [37] Laaksonen, T.J. and Roos, Y.H. (2000). Thermal, dynamic-mechanical, and dielectric analysis of phase and state transitions of frozen wheat doughs. *Journal of Cereal Science*. 32: 281-292.
- [38] Noel, T.R., Ring, S.G. and Whittam, M.A. (1992). Dielectric relaxations of small carbohydrate molecules in the liquid and glassy states. *Journal of Physical Chemistry*. 96: 5662-5667.
- [39] Roos, Y.H. (2003). Thermal analysis, state transitions and food quality. *Journal of Thermal Analysis and Calorimetry*. 71: 197-203.
- [40] Orford, P.D., Parker, R. and Ring, S.G. (1990). Aspects of glass transition of mixtures of carbohydrates of low molecular weight. *Carbohydrate Research*. 196: 11-18.

- [41] Kalichevsky, M.T. and Blanshard, J.M.V. (1992). A study of the effect of water on the glass transition of 1:1 mixtures of amylopectin, casein and gluten using DSC and DMTA. *Carbohydrate Polymers*. 19: 271-278.
- [42] Nikolaidis, A. and Labuza, T.P. (1996). Glass transition state diagram of a baked cracker and its relationship to gluten. *Journal of Food Science*. 61: 803-806.
- [43] Jouppila, K. and Roos, Y.H. (1994a). Glass transition and crystallization in milk powders. *Journal of Dairy Science*. 77: 2907-2915.
- [44] Jouppila, K. and Roos, Y.H. (1994b). Water sorption and time-dependent phenomena of milk powders. *Journal of Dairy Science*. 77: 1797-1808.
- [45] Adhikari, B.P, Howes, T., Bhandari, B.R. and Troung, V. (2001). Stickiness in foods: a review of mechanisms and test methods. *International Journal of Food Properties*. 4(1): 1-33.
- [46] Jouppila, K. and Roos, Y.H. (1997). Water sorption isotherms of freeze-dried milk products: applicability of linear and non-linear regression analysis in modelling. *International Journal of Food Science and Technology*. 32: 459-471.
- [47] Berlin, E., Kliman, P.G., Anderson, B.A. and Pallansch, M.J. (1972). Water binding in whey protein concentrates. *Journal of Dairy Science*. 56(8): 984-987.
- [48] Foster, K.D., Bronlund, J.E. and Paterson, A.H.J. (2005). The prediction of moisture sorption isotherms for dairy powders. *International Dairy Journal*. 15(4): 411-418.
- [49] Jouppila, K., Kansikas, J. and Roos, Y.H. (1997). Glass transitions, water plasticization, and lactose crystallization in skim milk powders. *Journal of Dairy Science*. 80: 3152-3160.
- [50] Roos, Y.H. and Karel, M. (1990). Differential scanning calorimetry study of phase transitions affecting the quality of dehydrated materials. *Biotechnology Progress*. 6: 159-163.
- [51] Roos, Y. and Karel, M. (1991c) Applying state diagrams to food processing and development. *Food Technology*. 44(12): 66-71.
- [52] Roos, Y.H. (2010). Glass transition temperature and its relevance in food processing. *Annual Review of Food Science and Technology*. 1: 496-469.
- [53] Rennie, P.R., Chen, X.D., Hargreaves, J.B. and Mackereth, A.R. (1999). A study of the cohesion of dairy powders. *Journal of Food Engineering*. 39: 277-284.
- [54] Fitzpatrick, J.J., Hodnett, M., Twomey, M., Cerqueira, P.S.M., O'Flynn, J. and Roos, Y.H. (2007). Glass transition and the flowability and caking of powders containing amorphous lactose. *Powder Technology*. 178: 119-128.
- [55] Nijdam, J.J. and Langrish, T.A.G. (2006). The effect of surface composition on the functional properties of milk powders. *Journal of Food Engineering*. 77: 919-925.
- [56] Paterson, A.H., Zuo, J.Y., Brounland, J.E. and Chatterjee, R. (2007). Stickiness curves of high fat dairy powders using the particle gun. *International Dairy Journal*. 17: 998-1005.

- [57] Schubert, H. (1987). Food particle technology. Part I: Properties of particles and particulate food systems. *Journal of Food Engineering*. 6: 1-32.
- [58] Palzer, S. (2005). The effect of glass transition on the desired and undesired agglomeration of amorphous food powders. *Chemical Engineering Science*. 60: 3959-3968.
- [59] Peleg, M. (1977). Flowability of food powders and methods for its evaluation: a review. *Journal of Food Process Engineering*. 1(4): 303-28.
- [60] Dolinsky, A., Maletskaya, K. and Snezhkin, Y. (2000). Fruit and vegetable powders production technology on the bases of spray and convective drying methods. *Drying Technology*. 18(3): 747-758.
- [61] Roos, Y.H. (2002). Importance of glass transition and water activity to spray drying and stability of dairy powders. *Lait*. 82: 475-484.
- [62] Adhikari, B., Howes, T., Bhandari, B.R. and Troung, V. (2004). Effect of addition of maltodextrins on drying kinetics and stickiness of sugar and acid-rich foods during convective drying: experiments and modelling. *Journal of Food Engineering*. 62: 53-68.
- [63] Adhikari, B., Howes, T., Shrestha, A. and Bhandari, B.R. (2007a). Effect of surface tension and viscosity on the surface stickiness of carbohydrate and protein solutions. *Journal of Food Engineering*. 79: 1136-1143.
- [64] Adhikari, B., Howes, T., Shrestha, A. and Bhandari, B.R. (2007b). Development of stickiness of whey protein isolate and lactose droplets during convective drying. *Chemical Engineering and Processing*. 46: 420-428.
- [65] Adhikari, B., Howes, T., Wood, B.J. and Bhandari, B.R. (2009). The effect of low molecular weight surfactants and proteins on surface stickiness of sucrose during powder information through spray drying. *Journal of Food Engineering*. 94: 135-143.
- [66] Adhikari, B., Howes, T., Bhandari, B.R. and Troung, V. (2003a). Surface stickiness drops of carbohydrate and organic acid solutions during convective drying: experiments and modeling. *Drying Technology*. 21(5): 839-873.
- [67] Adhikari, B., Howes, T., Bhandari, B.R. and Truong, V. (2003b). In situ characterization of stickiness of sugar-rich foods using a linear actuator driven stickiness testing device. *Journal of Food Engineering*. 58(1): 11-22.
- [68] Jaya, S. and Das, H. (2009). Glass transition and sticky point temperatures and stability/mobility diagram of fruit powders. *Food and Bioprocess Technology*. 2: 89-95.
- [69] Mukherjee, S. and Bhattacharya, S. (2006). Characterization of agglomeration process as a function of moisture content using a model food powder. *Journal of Texture Studies*. 37: 35-48
- [70] Buera, M.P., Levi, G. and Karel, M. (1992). Glass transition in poly (vinylpyrrolidone): Effect of molecular weight and diluents. *Biotechnology Progress*. 8: 144-148.
- [71] Gordon, M. and Taylor, J.S. (1952). Ideal copolymers and the second-order transitions

- of synthetic rubbers. i. non-crystalline copolymers. *Journal of Applied Chemistry*. 2(9): 493-500.
- [72] Couchman, P.R. (1980). Prediction of glass-transition temperature for compatible blends formed from homopolymers of arbitrary degree of polymerization. Compositional variation of glass-transition temperatures. 5. *Macromolecules*. 13: 1272-1276.
- [73] Chronakis, I.S. (1998). On the molecular characteristics, compositional properties, and structural functional mechanisms of maltodextrins: A review. *Critical Reviews in Food Science and Nutrition*. 38(7): 599-637.
- [74] Krause, S. (1986). Polymer-polymer miscibility. *Pure and Applied Chemistry*. 58(12): 1553-1560.
- [75] Lu, X. and Weiss, R.A. (1992). Relationship between the glass transition temperature and the interaction parameter of miscible binary polymer blends. *Macromolecules*. 25: 3242-3246.
- [76] Syrbe, A., Bauer, W.J. and Klostermeyer, H. (1998). Polymer science concepts in dairy systems-an overview of milk protein and food hydrocolloid interaction. *International Dairy Journal*. 8: 179-193.
- [77] Kalichevsky, M.T., Jaroszkiewicz, E.M., Ablett, S., Blanshard, J.M.V. and Lillford, P.J. (1992). The glass transition of amylopectin measured by DSC, DMTA and NMR. *Carbohydrate Polymers*. 18: 77-88.
- [78] Painter, P.C., Graf, J.F. and Coleman, M.M. (1991). Effect of hydrogen bonding on the enthalpy of mixing and the composition dependence of the glass transition temperature in polymer blends. *Macromolecules*. 24: 5630-5638.
- [79] Laemmli, U.K. (1970). Cleavage of structural proteins during the assembly of the head of bacteriophage T4. *Nature*. 227: 680-685.
- [80] Poirier-Brulez, F., Roudaut, G., Champion, D., Tanguy, M. and Simatos, D. (2006). Influence of sucrose and water content on molecular mobility in starch-based glasses as assessed through structure and secondary relaxation. *Biopolymers*. 81: 63-73.
- [81] Haque, M.K. and Roos, Y.H. (2004a). Water plasticization and crystallization of lactose in spray-dried lactose/protein mixtures. *Journal of Food Science*. 69(1): 24-29.
- [82] Haque, M.K. and Roos, Y.H. (2004b). Water sorption and plasticization behavior of spray-dried lactose/protein mixtures. *Journal of Food Science*. 69(8): 384-391.
- [83] Zhuang, H., Pearce, E.M. and Kwei, T.K. (1995). Self-association in poly (styrene-co-4-vinylbenzenephosphonic acid) and miscibility of its blends. *Polymer*. 36(11): 2237-2241.
- [84] Kristo, E. and Biliaderis, C.G. (2006). Water sorption and thermo-mechanical properties of water/sorbitol-plasticized composite biopolymer films: Caseinate-pullulan bilayers and blends. *Food Hydrocolloids*. 20: 1057-1071.
- [85] Levi, G. and Karel, M. (1995). Volumetric shrinkage (collapse) in freeze-dried carbohydrates above their glass transition temperature. *Food Research International*. 28(2): 145-151.
- [86] Roos, Y.H. and Karel, M. (1991b). Plasticizing effect of water on thermal

- behavior and crystallization of amorphous food models. *Journal of Food Science*. 56(1): 38-43.
- [87] Angell, C.A., Stell, R.C. and Sichina, W. (1982). Viscosity-temperature function for sorbitol from combined viscosity and differential scanning calorimetry studies. *Journal of Physical Chemistry*. 86: 1540-1542.
- [88] Angell, C.A., Bressel, R.D., Green, J.L., Kanno, H., Oguni, M. and Sare, E.J. (1994). Liquid fragility and the glass transition in water and aqueous solutions. *Journal of Food Engineering*. 22: 115-142.
- [89] Psurek, T., Maslanka, S. and Paluch, M. (2004). Effect of water on the primary and secondary relaxation of xylitol and sorbitol: Implication on the origin of the Johari-Goldstein relaxation. *Physical Review E*. 70(011503): 1-6.
- [90] William, M.L., Landel, R.F. and Ferry, J.D. (1955). The temperature dependence of relaxation mechanism in amorphous polymers and other glass-forming liquids. *Journal of the American Chemical Society*. 77: 3701-3707.
- [91] Moynihan, C.T. (1993). Correlation between the width of the glass transition region and the temperature dependence of the viscosity of high- T_g glasses. *Journal of the American Ceramic Society*. 76: 1081-1087.
- [92] Perez, J. (1994). Theories of liquid-glass transition. *Journal of Food Engineering*. 22(1-4): 89-114.
- [93] Slade, L. and Levine, H. (1995). Glass transitions and water-food structure interactions. *Advances in Food and Nutrition Research*. 38: 103-269.
- [94] El Moznine, R., Smith, G., Polygalov, E., Suherman, P.M. and Broadhead, J. (2003). Dielectric properties of residual water in amorphous lyophilized mixtures of sugar and drug. *Journal of Physics D: Applied Physics*. 36: 330-335.
- [95] Angell, C.A. (2002). Liquid fragility and the glass transition in water and aqueous solutions. *Chemical Reviews*. 102: 2627-2650.
- [96] Slade, L. and Levine, H. (1991). Beyond water activity: recent advances based on an alternative approach to the assessment of food quality and safety. *Critical Reviews in Food Science and Nutrition*. 30(2-3): 115-360.
- [97] Chan, R.K., Pathmanathan, K. and Johari, G.P. (1986). Dielectric relaxations in the liquid and glassy states of glucose and its water mixtures. *Journal of Physical Chemistry*. 90: 6358-6362.

*nattiga.sil@siam.edu

¹ Lecturer, Dr., Department of Food Technology, Faculty of Science, Siam University, Bangkok, Thailand.² Lecturer, Prof. Dr., School of Food and Nutritional Sciences, University College Cork, Cork, Ireland.